

# Installation Instructions


LED RUNNING VEST

LLSI-9100-CYL


## WARNING

1. Make sure the lights are fully charged before use.
2. Do not illuminate the human eye directly, causing immediate or temporary blindness. This product is not a toy, please ensure that this is used under the guidance of an adult.
3. Do not expose the product to the sun for a long-time, do not use any chemical agent when cleaning for preventing breakage.
4. Please do not disassemble the LED bulb for preventing any circuit board damage.
5. Remove the front light and back light before washing the running harness.
6. Don't immerse the product with led bulb into water.

### FIGURE 1

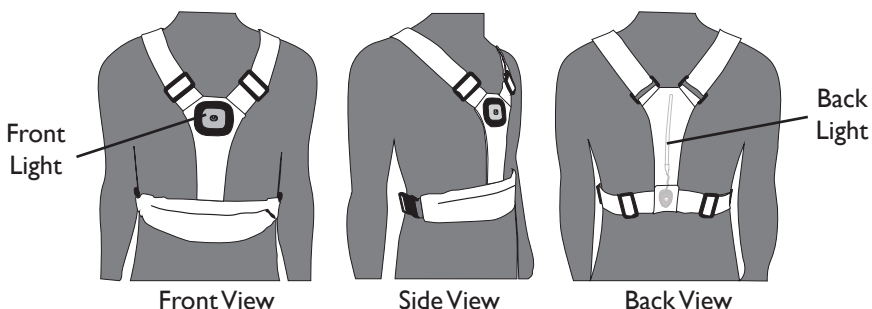


### FIGURE 2

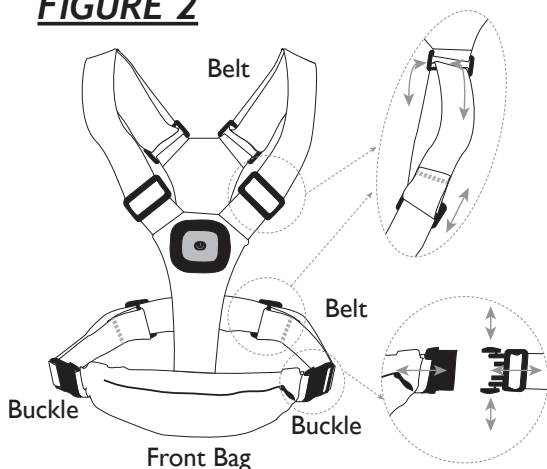

1. Separate the two buckles on both sides of the belt.
2. Place the belt over the head letting it hang on the shoulders.
3. Connect the two buckles back together.
4. Adjust the belt length from the chest and waist to fit your body.

# Installation Instructions

## Front Light

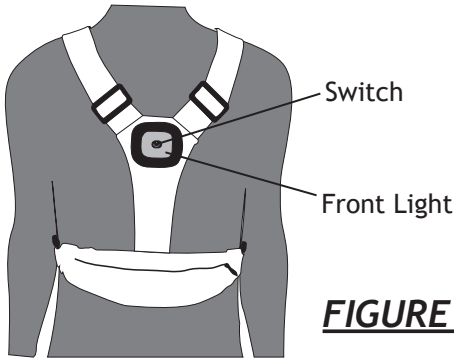


Press the switch to change the front light modes, below is the order:

100% ON >>> 50% ON >>>  
25% ON >>> OFF ...

**FIGURE 3**


## *How to Charge the Battery of the Front Light?*

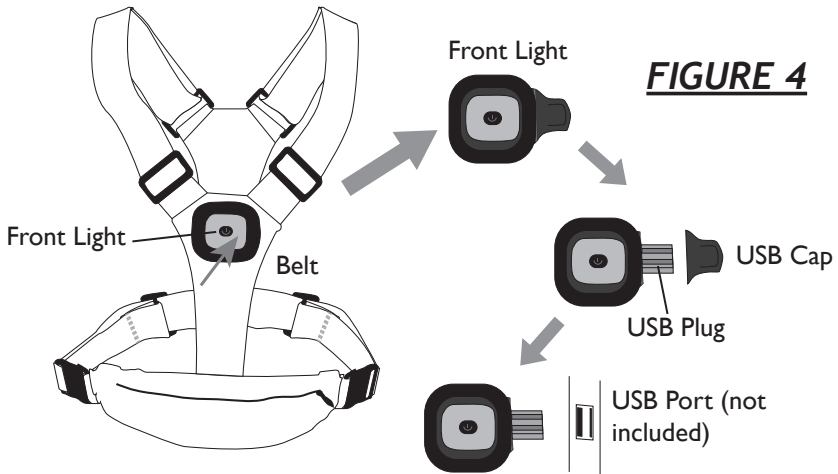

1. Press the front light and remove the front light from the belt.
2. Remove the USB cap to expose the USB plug.
3. Insert the USB plug into the USB port of power supply (not included).
4. The indicator inside of the front light is red when charging the battery. It will turn to green after battery is fully charged.
5. Place the USB cap back on to the USB plug and reverse the above steps to install the front light back into the belt when battery is fully charged.

# Installation Instructions

## Back Light

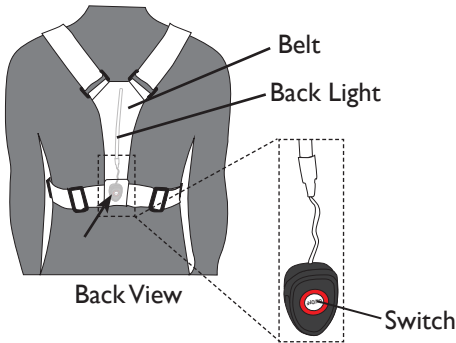


**FIGURE 5**

The switch of back light is inside of the back belt. Press the switch directly to change the back light modes ,below is the order:

Fast flash >>> Normal Flash >>>  
Constant Light >>> OFF ...

## *How to Charge the Battery of the Back Light?*

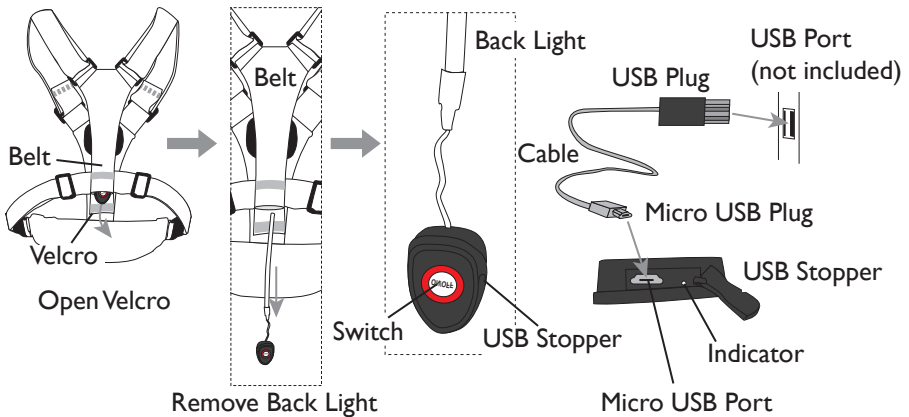

**FIGURE 6**

1. Open the velcro on the back belt.
2. Remove the back light out of the belt.
3. Open the USB stopper on the side of the switch to expose the Micro USB port.
4. Insert the Micro USB plug of the cable into the Micro USB port on the switch.
5. Insert the USB plug on the cable into the USB port of power supply (not included).
6. The indicator on the switch is red when charging the battery. It will turn to green after battery is fully charged.
7. Close the USB stopper in place and reverse the above steps to install the back light back into the belt when battery is fully charged. Always press velcro in place after inserting the back light.